

## 2362 LC


For truck, car and light truck wheels dynamic balancing in a single measurement cycle.

Voice synthesizer confirms each operation and suggests wheel balancing procedure.

Laser adjuster identifies precisely weight placement location..

### 2362 LC wheel balancer configuration:


- truck wheel balancing
- calibration - separate for car and truck wheels
- voice synthesizer
- hood
- ALU Function - only for car wheels
- monitor LCD
- laser adjuster
- lift

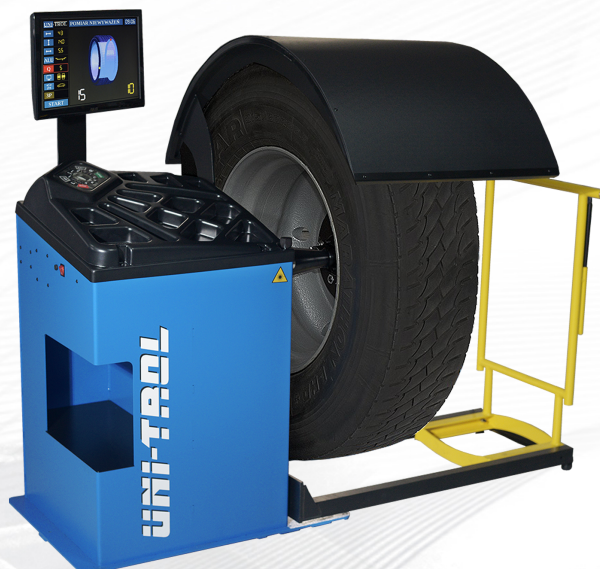

### Dane techniczne

|                                |                   |
|--------------------------------|-------------------|
| Rim diameter range:            | 10" - 30"         |
| Rim width range:               | 2" - 20"          |
| Maximum wheel weight           | 200 kg            |
| Balancing accuracy truck wheel | 10 g              |
| Balancing accuracy car wheel   | 1 g               |
| Measuring speed                | 130 - 150 obr/min |
| Power of the drive engine      | 150 W             |
| Electric supply                | 230V / 50 Hz      |
| Pneumatic power supply         | 8 - 10 bar        |
| Dimensions                     | 1100/1630/1580    |

Standard equipment:

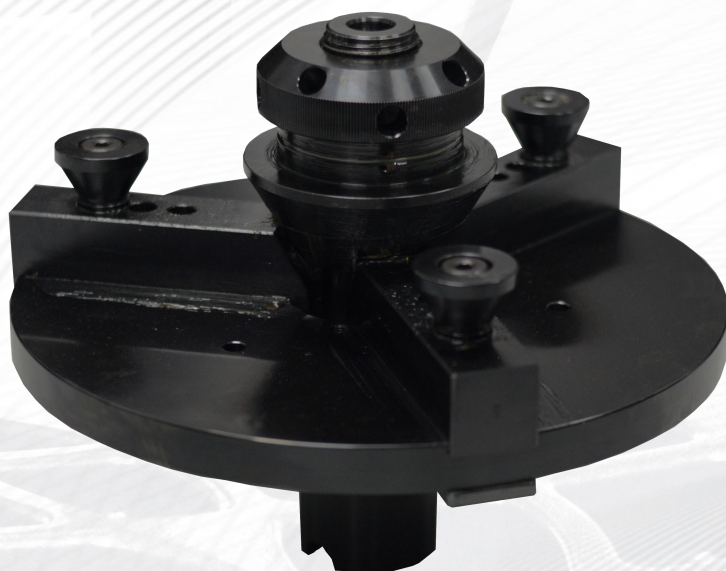

### Dostępne kolory







Kolory podstawowe



Kolory na zamówienie

## Wyposażenie dodatkowe
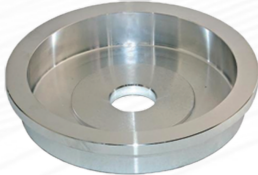
| Indeks       | Opis                  | Zdjęcie   |
|--------------|-----------------------|---|
| 06.04.017.40 | Stożek 110-125 mm Ø40 |    |
| 04.04.008.40 | Stożek 125-145 mm Ø40 |   |
| 06.04.009.40 | Stożek 145-165 mm Ø40 |  |
| 150400043    | Stożek 122-174 mm Ø40 |  |

| Indeks    | Opis  | Zdjęcie   |
|-----------|---|---|
| 190400018 | Pierścień dystansowy do stożków dostawczych Ø40 |    |
| W-U-5AH   | Uchwyt motocyklowy                              |   |
| T-CĘG-001 | Cęgi wulkanizatorskie                           |  |
| WT-2065-1 | Skrobak do ciężarków klejonych                  |  |