


PO-14S

Wheel rim straightening machine for steel and aluminum wheel rims 10"-24". A wheel rim is repaired by means of a hydraulic piston and special working end caps, which are a part of the machine equipment.

Repair operations are easy and take not more than few minutes. Working end caps allow to fix a damaged wheel rim in any place of its deformation.

The machine is also equipped with a rim positioning head, several centering rings, various end caps and sealing elements.

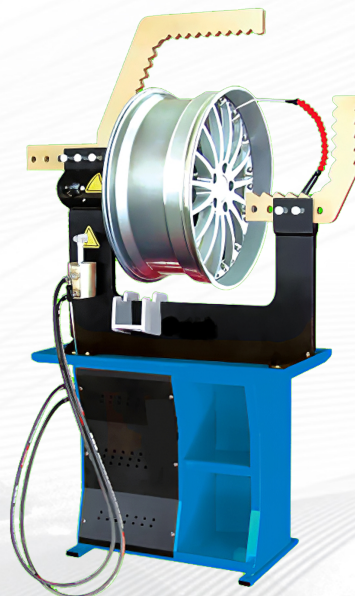

Dane techniczne

Dimensions	1640/1240/4300
noise level	75 db
Weight	165 kg
Repair rim diameter range	do 24"
max. hydraulic pump pressure	160 bar
Electric supply	3x400V / 50 Hz
Pump motor power	0,55 kW

