


## UNI-LIFT PD-5.0

- Lift with electro-hydraulic drive and chain lifting system
- Cylinder synchronization independent of load distribution with a mechanical leveling system
- Mechanical locks with automatic engagement and electric release
- Voluntary directional control
- Double-bolted adapter as standard
- Automatic arm safety
- Overpressure relief valve in the power unit
- 24V safety control
- Crush protection

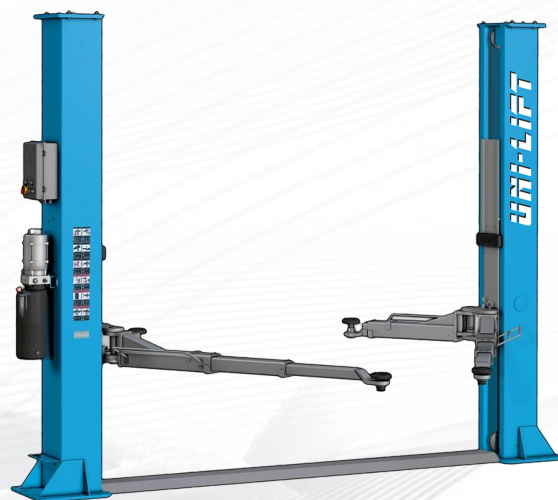

### Dane techniczne

Capacity	5000 kg
Max. height	1900 mm
Min. height	30 mm
Min. plate height	115 mm
Column height	2848 mm
Clear distance column	2805 mm
Drive-through width	2500 mm
Arm extension range	820-1700 mm
Clear distance column	3650 mm
Lifting time	60 s
Weight	950 kg





