

2312 LP

The TROLL 2312 LP wheel balancer is equipped with a modern laser adjustment system that remembers the wheel's parameters during input. After measuring imbalances, it precisely indicates the location for placing the weight. Additionally, the device features an integrated ultrasonic sonar for contactless wheel width measurement.

- Pneumatic wheel mounting clamp
- Auto-guiding to the unbalanced spot
- Automatic adjustment
- ALU programs
- 2 ALU programs for motorcycles
- Optimization
- 3P - hidden weight
- LCD display

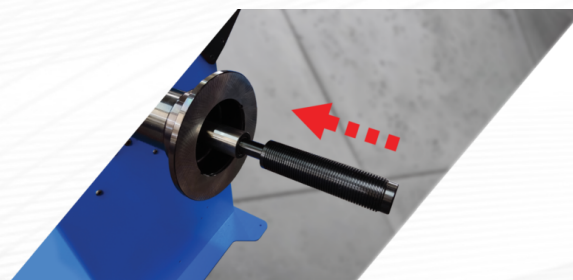


Technical Data

Rim diameter range:	10" - 30"
Rim width range:	2" - 15"
Maximum wheel weight	70 kg
Balancing accuracy	1 g
Measuring speed	140 obr/min
Power of the drive engine	80 W
Electric supply	230V / 50 Hz
Dimensions	880/1070/1500
Weight	90 kg

Distinctive features:

Pneumatic clamp.



Anvil.



Ergonomic tool tray.

Available Colors






Basic Colors



Custom Colors

Additional Equipment

Index	Description	Photo
DO-5P	Flange plate 5-bolts	
150400049	Cone 95-132 mm Ø40	
06.04.008.40	Cone 125-145 mm Ø40	
06.04.009.40	Cone 145-165 mm Ø40	

Index	Description	Photo
150400043	Cone 122-174 mm Ø40	
190400018	Distance spacer for shaft Ø40	
PPK-1	Wheel lift PPK-1 for wheel balancer	
T-CĘG-001	Wheel Balancing Weight Plier& Hammer Tool	

Index	Description	Photo
WT-2065-1	Wheel Weight Scraper Tool	