

## 2312

**2312** is a wheel balancer with automatic measuring arm to enter wheel parameters and wheel guidance system directing the wheel to unbalance point.. The system memorizes the data and shows precisely the weight location.

- Automatic positioning lock
- Automatic measuring arm
- ALU programmes
- 2 ALU programmes for motorbike
- Optimization
- Programme "hidden weight"




### Dane techniczne

Rim diameter range:	10" - 30"
Rim width range:	2" - 15"
Maximum wheel weight	70 kg
Balancing accuracy	1 g
Measuring speed	140 obr/min
Power of the drive engine	80 W
Electric supply	230V / 50 Hz
Dimensions	880/1070/1500
Weight	90 kg

## Distinctive features:

---

**Haweke SoftGrip with cylinder 40 mm  
and 3 cones 44-111,5 mm.**

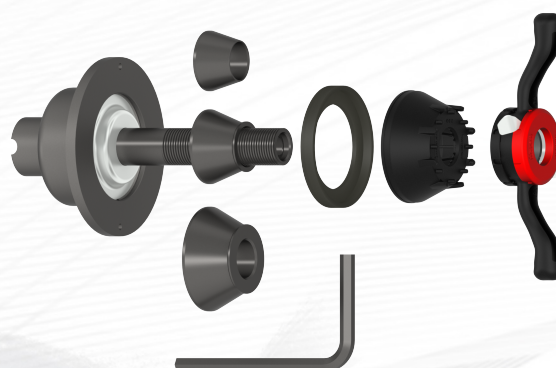

**Anvil.**



**Ergonomic tool tray.**



## Dostępne kolory



Kolory podstawowe



Kolory na zamówienie

## Wyposażenie dodatkowe

Indeks	Opis	Zdjęcie
DO-5P	Docisk palcowy 5-bolcowy	
150 400 049	Stożek 95-132 mm Ø40	
06.04.008.40	Stożek 125-145 mm Ø40	
150400043	Stożek 122-174 mm Ø40	

Indeks	Opis	Zdjęcie
190400018	Pierścień dystansowy do stożków dostawczych Ø40	
W-U-5AH	Uchwyt motocyklowy	
PPK-2	Podnośnik koła PPK-1	
T-CĘG-001	Cęgi wulkanizatorskie	

Indeks	Opis	Zdjęcie
CYR-001	Cyrkiel wulkanizatorski	
WT-2065-1	Skrobak do ciężarków klejonych	