

TOTEM P

TOTEM P is a wheel balancer with laser measuring arm entering wheel parameters and wheel guidance system directing the wheel to unbalance point. The system memorizes the data and shows precisely the weight position. The machine is equipped with ultrasonic sonar for contactless wheel width measurement and rim recognition system according to the entered parameters.

The completely new operating system based on two buttons and a wheel as a selection cursor makes the machine very intuitive to use.

The machine has a touchscreen LCD monitor making the navigation through the menu even easier and faster. The machine can be equipped with a pneumatic clamp.



- Automatic positioning lock
- Laser measuring arm
- Laser line
- Automatic ultrasonic non-contact rim width acquisition
- ALU programmes
- 2 ALU programmes for motorbikes
- Optimization
- Programme "hidden weight"
- Voice synthesizer
- Touchscreen LCD monitor
- Pneumatic clamp and 3 cones

Dane techniczne

Rim diameter range:	10" - 30"
Rim width range:	2" - 15"
Maximum wheel weight	80 kg
Balancing accuracy	1 g
Measuring speed	140 obr/min
Power of the drive engine	80 W
Electric supply	230V / 50 Hz
Pneumatic power supply	8 - 10 bar
Dimensions	1010/1350/1550
Weight	120 kg


Distinctive features:

New interface



Touchscreen monitor


Precise laser indicator

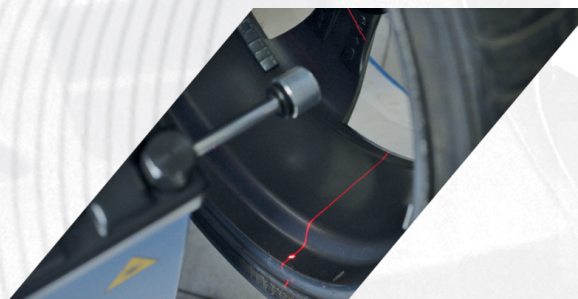




Easy calibration

Keyboard-free navigation

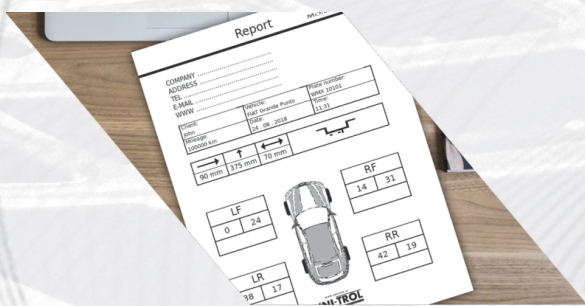

Print to file

Work lighting

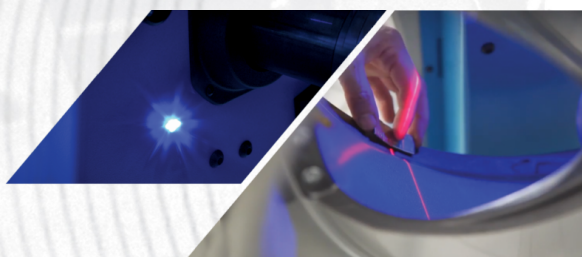



Automatic wheel positioning

Pneumatic clamp



Dostępne kolory



Kolory podstawowe



Kolory na zamówienie

Wyposażenie dodatkowe

Indeks	Opis	Zdjęcie
DO-5P	Docisk palcowy 5-bolcowy	
150400049	Stożek 95-132 mm Ø40	
04.04.008.40	Stożek 125-145 mm Ø40	
06.04.009.40	Stożek 145-165 mm Ø40	

Indeks	Opis	Zdjęcie
150400043	Stożek 122-174 mm Ø40	
190400018	Pierścień dystansowy do stożków dostawczych Ø40	
PPK-2	Podnośnik koła PPK-1	
T-CĘG-001	Cęgi wulkanizatorskie	

Indeks	Opis	Zdjęcie
WT-2065-1	Skrobak do ciężarków klejonych	