PO-30 2S

Wheel Rim Straightening Machine for steel and aluminum wheel rims 13"-30”. A wheel rim is repaired by means of two hydraulic cylinders supplied with suitable working end caps of various shapes. Fixing disc with 6 holes and centering ring provide secure rim fixing independently on rim's holes number.

Repair operations are easy and take not more than few minutes. Working end caps allow to fix a damaged wheel rim in any place of its deformation.

Technical Data

Repair rim diameter range	13" - 30"
Straightening cylinder force	45 kN
Pump motor power	0,55 kW
max. hydraulic pump pressure	200 bar
noise level	75 dB
Electric supply	3x400V / 50 Hz
Power of the drive engine	0,55 kW
Weight	450 kg

UNI-TROL Sp. z o.o.
ul. Estrady 56
01-932 Warszawa

tel. (22) 817 94 21 22, 817 94 34 35, 834 90 13 14
SPRZEDAŻ wew. 118 i 121, SERWIS wew. 131 i 134
www.unitrol.pl | office@unitrol.pl | serwis@unitrol.pl

Advantages:

reinforced and enlarged frame

cylinder holder

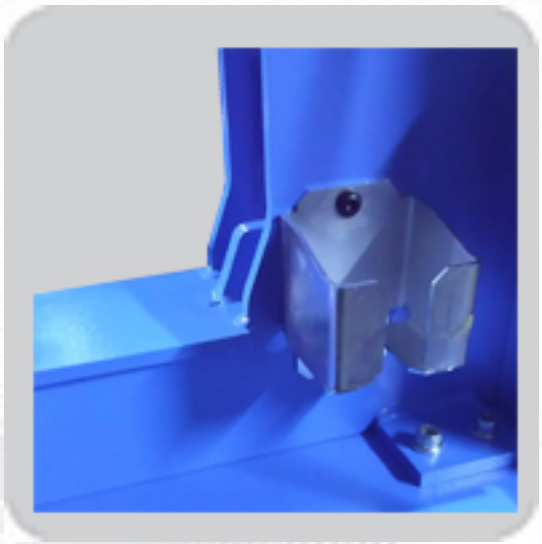

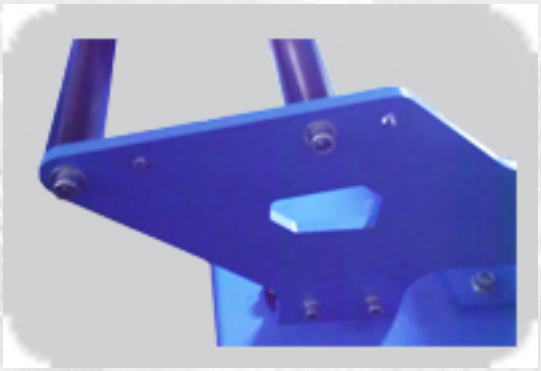

adjustable lathe offset

The wheel rim straightening machine is equipped with:

- working end caps of various shapes suitable for different rim deformations
- a set of centering rings for wheel rims of different central opening diameters
- deformation positioning device
- mounting plates with adjustable set screws
- preliminary straightening lever

UNI-TROL Sp. z o.o.
ul. Estrady 56
01-932 Warszawa

tel. (22) 817 94 21 22, 817 94 34 35, 834 90 13 14
SPRZEDAŻ wew. 118 i 121, SERWIS wew. 131 i 134
www.unitrol.pl | office@unitrol.pl | serwis@unitrol.pl

Available Colors

Basic Colors

Custom Colors

UNI-TROL Sp. z o.o.
ul. Estrady 56
01-932 Warszawa

tel. (22) 817 94 21 22, 817 94 34 35, 834 90 13 14
SPRZEDAŻ wew. 118 i 121, SERWIS wew. 131 i 134
www.unitrol.pl | office@unitrol.pl | serwis@unitrol.pl

Additional Equipment

Index	Description	Photo
02.09.001	Set of centering rings 54-74 mm, 17 pcs.	

UNI-TROL Sp. z o.o.
ul. Estrady 56
01-932 Warszawa

tel. (22) 817 94 21 22, 817 94 34 35, 834 90 13 14
SPRZEDAŻ wew. 118 i 121, SERWIS wew. 131 i 134
www.unitrol.pl | office@unitrol.pl | serwis@unitrol.pl